

MITSUBISHI HEAVY INDUSTRIES

FDC280KXZME1

28.0 KW




Specificații tehnice

Capacitate nominala (cai putere)				10HP
Sursă de alimentare				Trifazic 380-415V, 50Hz
Putere de pornire			A	5
Curent maxim admis			A	20
Capacitate nominala	Racire		kW	28.0
	Incalzire			28.0
Consumul de energie		Racire	kW	7.90
		Incalzire		6.53
Dimensiuni exterioare	I/L/A		mm	1675x1080x480
Nivel de presiune sonoră	Racire/Incalzire		dB(A)	60/60
Greutate netă			kg	221
Refrigerant	Tip / GWP			R410A / 2088
Refrigerant	Incarcare		kg/TCO2Eq	11.5 / 24.012
Dimensiuni țeavă refrigerant	Refrigerant lichid		mm(in)	ø9.52(3/8")
Dimensiuni țeavă refrigerant	Refrigerant gazos		mm(in)	ø22.22(7/8")
Capacitatea minima/maxima acceptata			%	50~150
Numarul maxim de unitati interne acceptate				24
SEER / SCOP (Unitate externă)				6.03 / 4.54

Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.

Schema tehnică

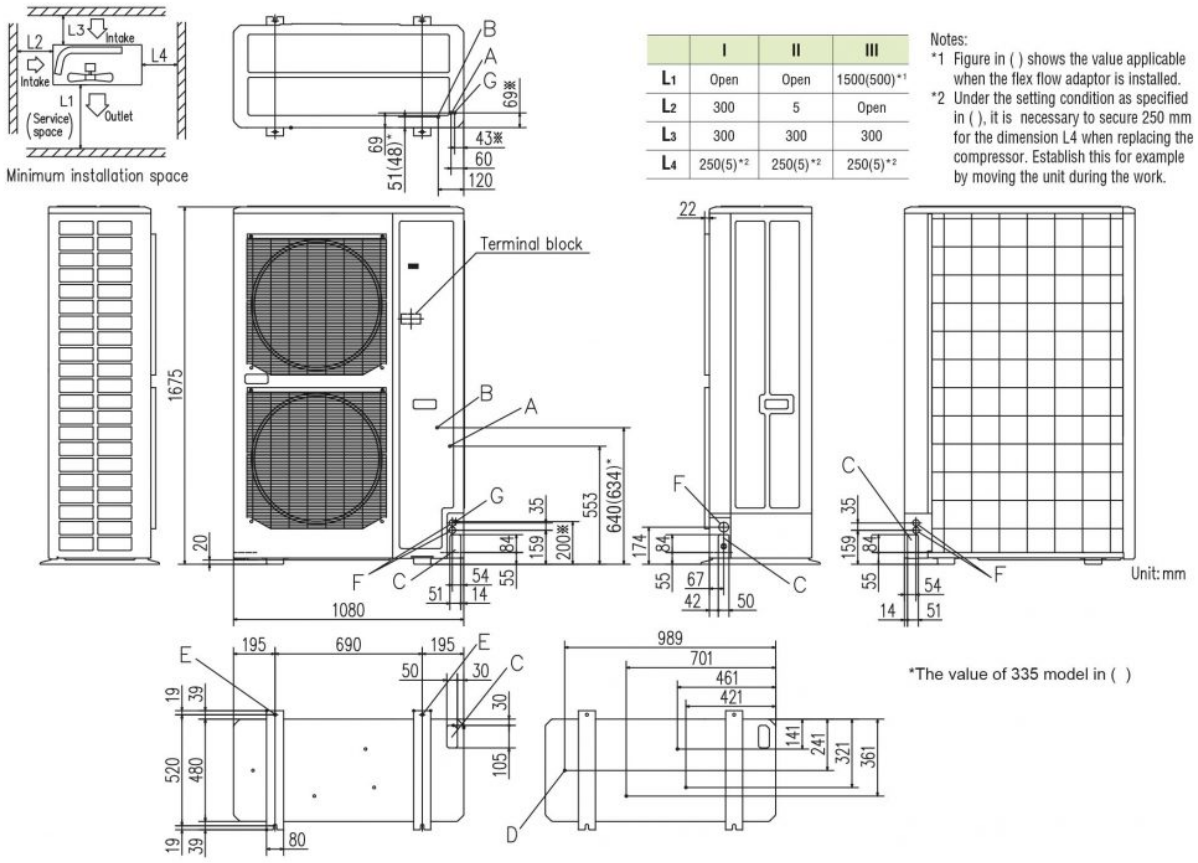

	I	II	III
L_1	Open	Open	1500(500)*1
L_2	300	5	Open
L_3	300	300	300
L_4	250(5)*2	250(5)*2	250(5)*2

Notes:
*1 Figure in ( ) shows the value applicable when the flex flow adaptor is installed.
*2 Under the setting condition as specified in ( ), it is necessary to secure 250 mm for the dimension L4 when replacing the compressor. Establish this for example by moving the unit during the work.

*The value of 335 model in ( )

Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.