




TEMPERATURE CONTROL FOR TODAY & TOMORROW

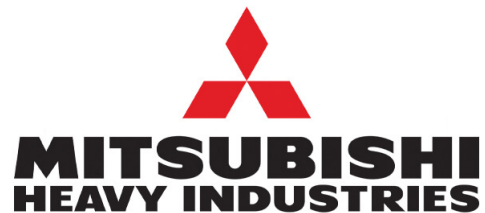

FDC850KXZXE2

84.0 KW




Specificații tehnice

Combinatii posibile (FDC)			280KXZXE2 + 280KXZXE2 + 280KXZXE2
Capacitate nominala (cai putere)			30HP
Sursă de alimentare			Trifazic 380-415V, 50Hz
Putere de pornire		A	15
Curent maxim admis		A	60.3
Capacitate nominala	Racire	kW	84.0
	Incalzire		94.5
Consumul de energie	Racire	kW	21.76
	Incalzire		22.23
Dimensiuni exterioare	I/L/A	mm	1697x4050x720
Greutate netă		kg	864
Refrigerant	Tip / GWP		R410A
Incarcare refrigerant	R410A	kg	11.0x3
Dimensiuni țevă refrigerant	Refrigerant lichid	mm(in)	ø15.88(5/8")
Dimensiuni țevă refrigerant	Refrigerant gazos	mm(in)	ø31.75(1 1/4") [ø34.92(1 3/8")]
Capacitatea minima/maxima acceptata		%	80-160
Numarul maxim de unitati interne acceptate			80



TEMPERATURE CONTROL FOR TODAY & TOMORROW

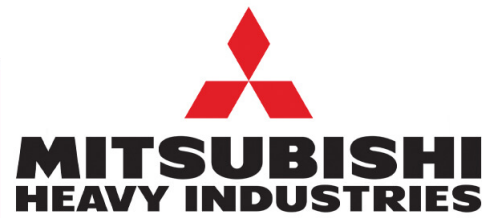

Schema tehnică

Dimensions

All measurements in mm.

