

MITSUBISHI HEAVY INDUSTRIES

FDUH22KXE6F

2.2 KW




Specificații tehnice

Capacitate nominală de răcire		kW	2.2
Capacitate nominala de incalzire		kW	2.5
Sursă de alimentare			Monofazic 220-240V, 50Hz
Consumul de energie	Racire	kW	0.05-0.07
	Incalzire	kW	0.05-0.07
Nivel putere sonoră		dB(A)	60
Nivel de presiune sonoră racire		db(A)	P-Hi: 39 Hi: 33 Me: 30 Lo: 27
Dimensiuni exterioare unitate	I x L x A	mm	257x570x530
Greutate netă		kg	22
Flux de aer		m^3/min	P-Hi: 8.5 Hi: 7 Me: 6.5 Lo: 6
Presiunea statica externa maxima		Pa	30
Aport de aer proaspat			Este posibil de la retur duct
Filtru de aer			Kit filtru: UH-FL1E (opțională)
Telecomanda (opțională)			Cu fir: RC-EX3A, RC-E5, RCH-E3 Fara fir: RCN-KIT4-E2
Dimensiuni țeavă refrigerant		mm(in)	Refrigerant lichid: ø6.35(1/4") Refrigerant gazos: ø9.52(3/8")

Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.

Schema tehnică

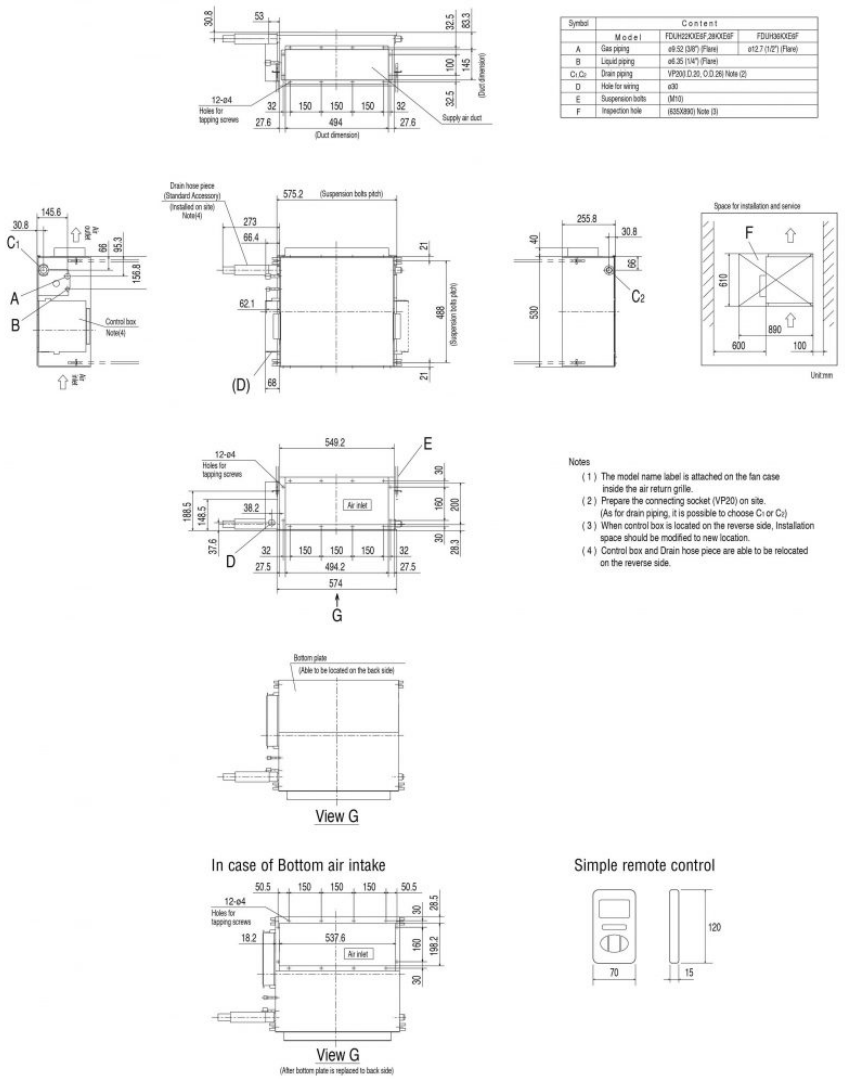

Notes

(1) The model name label is attached on the fan case inside the air return grille.
(2) Prepare the connecting socket (VP20) on site. (As for drain piping, it is possible to choose C_1 or C_2)
(3) When control box is located on the reverse side, Installation space should be modified to new location.
(4) Control box and Drain hose piece are able to be relocated on the reverse side.

Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.