


MITSUBISHI HEAVY INDUSTRIES

# FDUH28KXE6F

## 2.8 KW




## Specificații tehnice

| | | | |
|---|---|---|---|
| Capacitate nominală de răcire | | kW | 2.8 |
| Capacitate nominala de incalzire | | kW | 3.2 |
| Sursă de alimentare | | | Monofazic 220-240V, 50Hz |
| Consumul de energie | Racire | kW | 0.05-0.07 |
| | Incalzire | kW | 0.05-0.07 |
| Nivel putere sonoră | | dB(A) | 60 |
| Nivel de presiune sonoră racire | | db(A) | P-Hi: 39 Hi: 33 Me: 30 Lo: 27 |
| Dimensiuni exterioare unitate | I x L x A | mm | 257x570x530 |
| Greutate netă | | kg | 22 |
| Flux de aer | | $m^3$/min | P-Hi: 8.5 Hi: 7 Me: 6.5 Lo: 6 |
| Presiunea statica externa maxima | | Pa | 30 |
| Aport de aer proaspat | | | Este posibil de la retur duct |
| Filtru de aer | | | Kit filtru: UH-FL1E (opționalal) |
| Telecomanda (opționalal) | | | Cu fir: RC-EX3A, RC-E5, RCH-E3 Fara fir: RCN-KIT4-E2 |
| Dimensiuni țeavă refrigerant | | mm(in) | Refrigerant lichid: ø6.35(1/4") Refrigerant gazos: ø9.52(3/8") |

Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.

## Schema tehnică

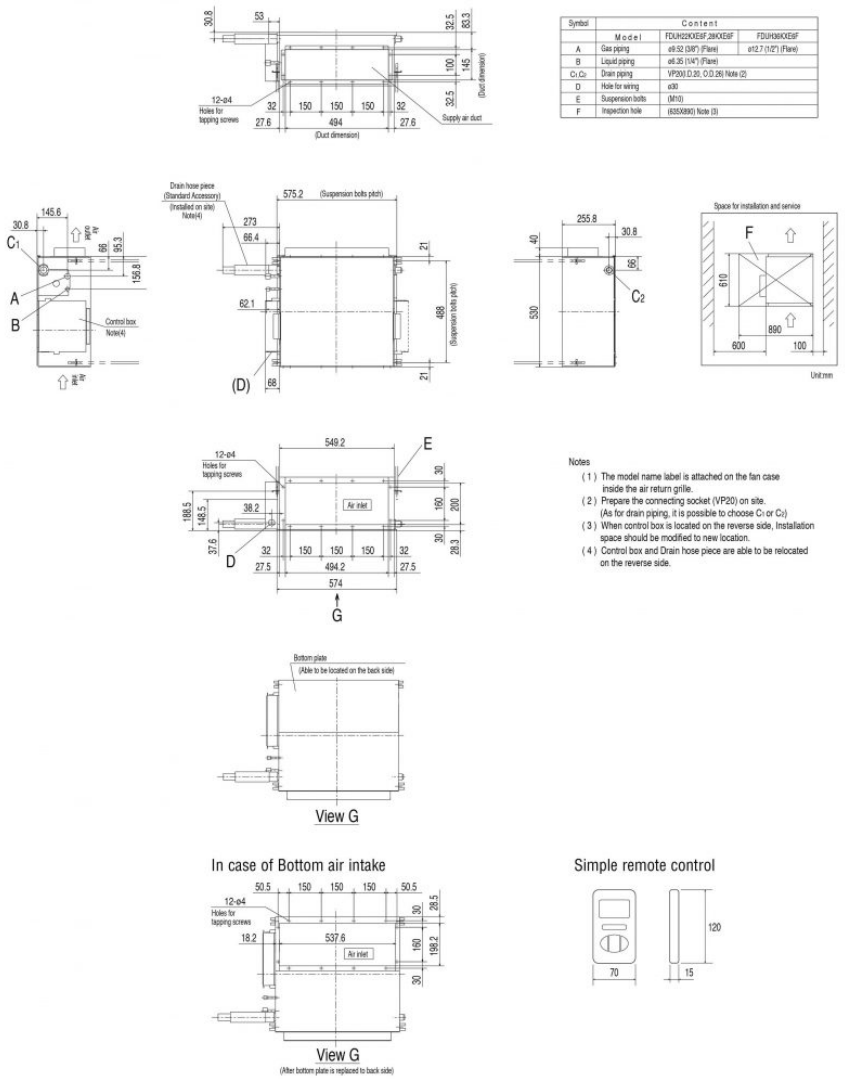


Notes

(1) The model name label is attached on the fan case inside the air return grille.
(2) Prepare the connecting socket (VP20) on site. (As for drain piping, it is possible to choose $C_1$ or $C_2$)
(3) When control box is located on the reverse side, Installation space should be modified to new location.
(4) Control box and Drain hose piece are able to be relocated on the reverse side.

Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.