

MITSUBISHI HEAVY INDUSTRIES

FDUM36KXE6F

3.6 KW




Specificații tehnice


Capacitate nominală de răcire		kW	3.6
Capacitate nominala de incalzire		kW	4.0
Sursă de alimentare			Monofazic 220-240V, 50Hz
Consumul de energie	Racire	kW	0.10-0.10
	Incalzire	kW	0.10-0.10
Nivel putere sonoră		dB(A)	60
Nivel de presiune sonoră racire		db(A)	P-Hi: 37 Hi:32 Me:29 Lo:26
Dimensiuni exterioare unitate	l x L x A	mm	280 x 750 x 635
Greutate netă		kg	29
Flux de aer		m^3/min	P-Hi: 13 Hi:10 Me:9 Lo:8
Presiunea statica externa maxima		Pa	100
Aport de aer proaspat			Este posibil
Filtru de aer			Kit filtru::UM-FL1EF/UM-FL2EF/UM-FL3EF (opțională)
Telecomanda (opțională)			Cu fir: RC-EX3A, RC-E5, RCH-E3 Fara fir: RCN-KIT4-E2
Dimensiuni țeavă refrigerant		mm(in)	Refrigerant lichid: ø6.35(1/4") Refrigerant gazos: ø12.7(1/2")

Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.

Schema tehnică

FDUM22KXE6F, 28KXE6F, 36KXE6F, 45KXE6F, 56KXE6F

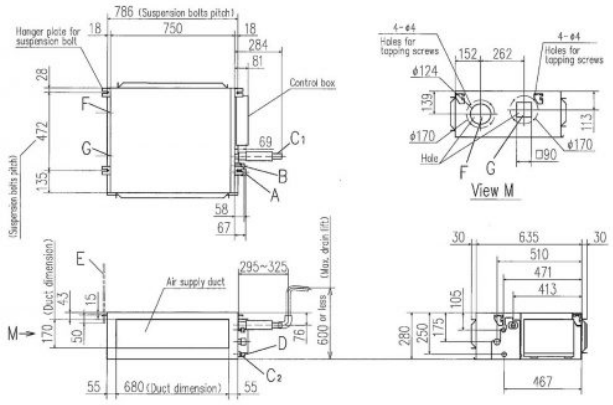



Symbol	Content		
	Model	22,28	36,45,56
A	Gas piping	ø9.52 (3/8") (Flare)	ø12.7 (1/2") (Flare)
B	Liquid piping	ø6.35 (1/4") (Flare)	
C1	Drain piping	VP25 (O.D.32)	
C2	Drain piping (Gravity drainage)	VP20	
D	Hole for wiring		
E	Suspension bolts	(M10)	
F	Outside air opening for ducting	(Knock out)	
G	Air outlet opening for ducting	(Knock out)	
H	Inspection hole	(450X450)	

Note: The model name label is attached on the lid of the control box.

