

MITSUBISHI HEAVY INDUSTRIES

SRK25ZS-W

2.5 KW



Specificații tehnice

R32


Capacitate nominală de răcire		kW	2.5
Capacitate nominală de încălzire		kW	3.2
Nivel putere sonoră	Răcire	dB(A)	50
	Încălzire	dB(A)	53
Nivel presiune sonoră	Răcire(Hi/Me/Lo/Ulo)	dB(A)	36 / 28 / 23 / 19
	Încălzire(Hi/Me/Lo/Ulo)	dB(A)	39 / 30 / 24 / 19
Flux de aer	Răcire(Hi/Me/Lo/Ulo)	m^3/min	9.9 / 8.0 / 5.9 / 5.0
	Încălzire(Hi/Me/Lo/Ulo)	m^3/min	11.3 / 8.7 / 6.7 / 5.9
Dimensiuni exterioare (HÃWÃD)		mm	290Ã870Ã230
Greutate netă		kg	9.5
Dimensiuni țeavă refrigerant	Lichid / Gaz	mm â	6.35(1/4") / 9.52(3/8")
Filtre			Allergen Clear Filter Ã 1, Photocatalytic lavabil Deodorizing Filter Ã 1


Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.


Schema tehnică



Symbol	Content	
A	Gas piping	SRK20, 25, 35 ϕ9.52 (3/8") (Flare) SRK50 ϕ12.7 (1/2") (Flare)
B	Liquid piping	ϕ6.35 (1/4") (Flare)
C	Hole on wall for right rear piping	(ϕ65)
D	Hole on wall for left rear piping	(ϕ65)
E	Drain hose	VP16
F	Outlet for piping (on both side)	

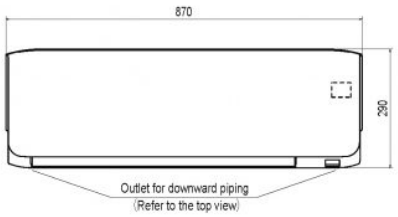



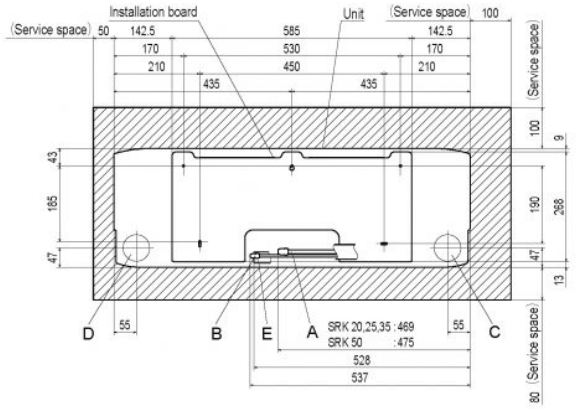

Space for installation and service when viewing from the front

Notes (1) The model name label is attached on the right side of the unit.
(2) To connect the wired remote control, the interface kit (SC-BIKN-E) is required.

Unit:mm

Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.