

MITSUBISHI HEAVY INDUSTRIES

SRK50ZSX-W

5.0 KW




Specificații tehnice

R32

Capacitate nominală de răcire		kW	5.0
Capacitate nominală de încălzire		kW	6.0
Nivel putere sonoră	Răcire	dB(A)	59
	Încălzire	dB(A)	62
Nivel presiune sonoră	Răcire(Hi/Me/Lo/Ulo)	dB(A)	44 / 39 / 31 / 22
	Încălzire(Hi/Me/Lo/Ulo)	dB(A)	47 / 41 / 33 / 23
Flux de aer	Răcire(Hi/Me/Lo/Ulo)	m^3/min	14.3 / 12.4 / 7.8 / 5.4
	Încălzire(Hi/Me/Lo/Ulo)	m^3/min	17.3 / 14.3 / 9.8 / 6.2
Dimensiuni exterioare (HÃWÃD)		mm	305Ã920Ã220
Greutate netă		kg	13.0
Dimensiuni țeavă refrigerant	Lichid / Gaz	mm â	6.35(1/4") / 12.7(1/2")
Filtre			Allergen Clear Filter Ã1, Photocatalytic lavabil Deodorizing FilterÃ1

Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.

Schema tehnică

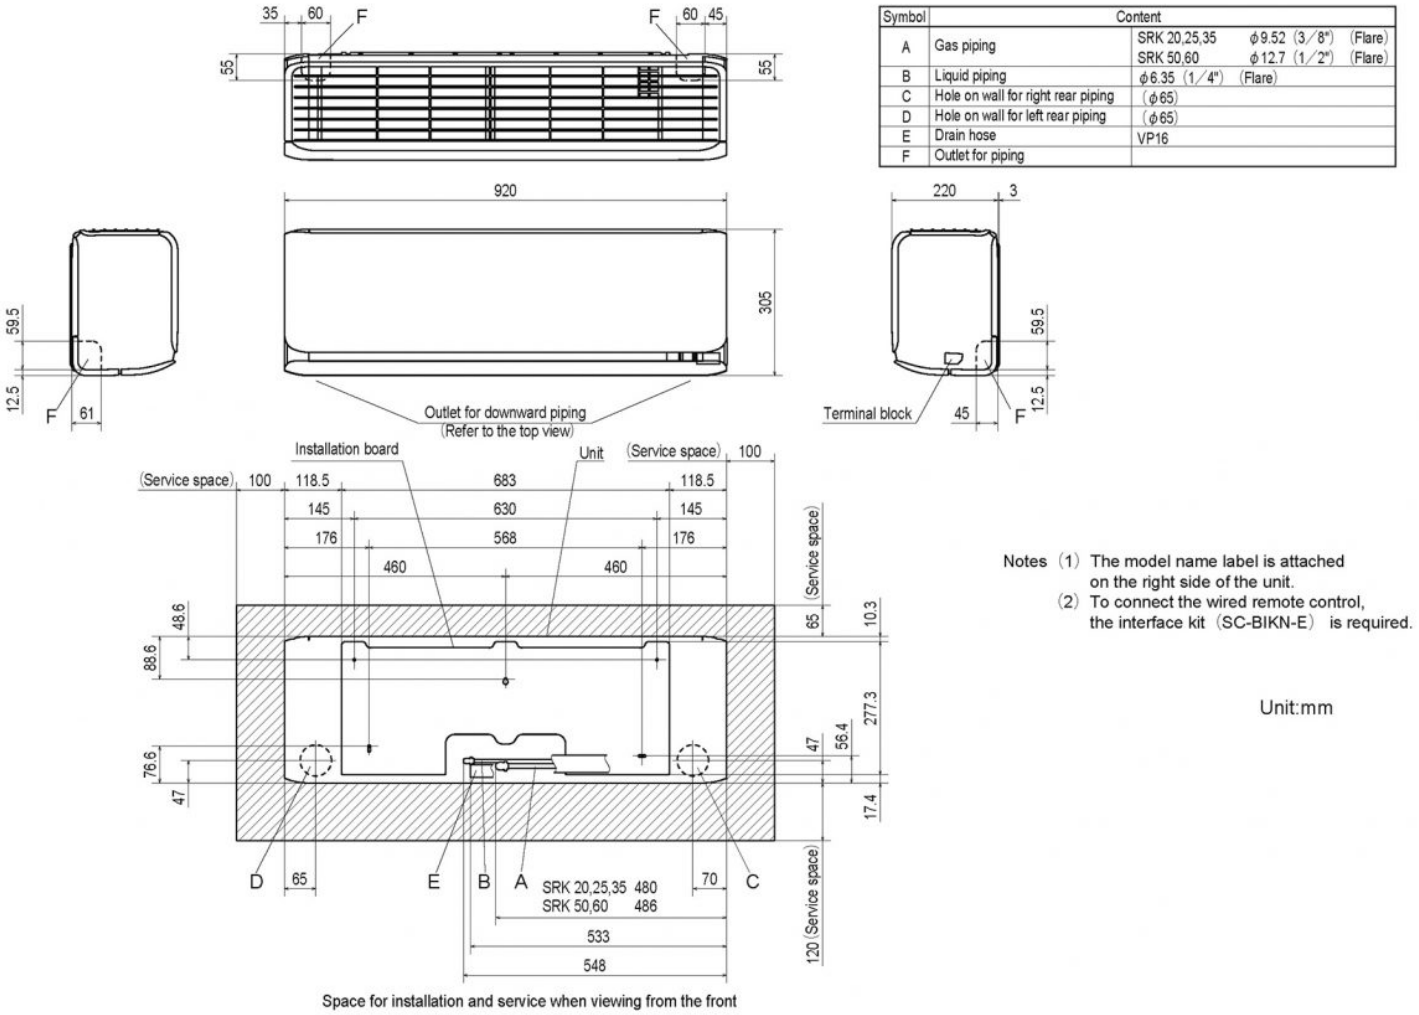

Symbol	Content	
A	Gas piping	SRK 20,25,35 ϕ9.52 (3/8") (Flare) SRK 50,60 ϕ12.7 (1/2") (Flare)
B	Liquid piping	ϕ6.35 (1/4") (Flare)
C	Hole on wall for right rear piping	(ϕ65)
D	Hole on wall for left rear piping	(ϕ65)
E	Drain hose	VP16
F	Outlet for piping	

Space for installation and service when viewing from the front

Notes (1) The model name label is attached on the right side of the unit.
(2) To connect the wired remote control, the interface kit (SC-BIKN-E) is required.

Unit:mm

Datorită politicii de continuă îmbunătățire a produselor, ne rezervăm dreptul de a modifica specificațiile tehnice fără nicio notificare prealabilă.